

**Wall mounted
Vision 120 cm
White**

EAN 5414425103959



Energy label

▪ Energy Efficiency class (EEIhood)	A+
▪ Annual Energy Consumption (kWh/year) (AEChood)	49,3
▪ Fluid Dynamic Efficiency class (FDEhood)	A
▪ Lighting Efficiency class (LEhood)	A
▪ Grease Filtering Efficiency class (GFEhood)	C

Functions & features

▪ Control method	Touch control
▪ Number of speeds	3 + power
▪ Automatic Power revert (minutes)	6
▪ Motor	Integrated
▪ Sound absorber	Integrated
▪ InTouch function	Optional
▪ Auto stop	▪
▪ Delayed switch off (minutes)	10
▪ Number of grease filters	2
▪ Grease filter	7830020
▪ Grease filter cleaning indication	▪
▪ Recirculation filter cleaning indication	-

Dimensions

▪ Product dimensions exhaust (WxDxHmin-Hmax) (mm)	1198 x 429 x 830 - 1100
▪ Product dimensions recirculation (WxDxHmin-Hmax) (mm)	1198 x 429 x - 1390
▪ Advised mounting height induction hobs (Hmin-Hmax) (mm)	500 - 750
▪ Advised mounting height gas hobs (Hmin-Hmax) (mm)	650 - 750
▪ Advised mounting height ceramic hobs (Hmin-Hmax) (mm)	500 - 750
▪ Position exhaust	Top, Back

Lighting

▪ Functional lighting type	Led
▪ Dimmable light	-
▪ Soft-ON/OFF	-
▪ Total energy consumption functional light (W)	4
▪ Color functional light	2700

Airflow and noise level


▪ Airflow (m ³ /h) measured according to EN 61591	
▪ Sound regulation according to EN 60704-2-13	
▪ Airflow speed 1 (m ³ /h) / Max Pressure speed 1 (Pa)	239 / 321
▪ Airflow speed 2 (m ³ /h) / Max Pressure speed 2 (Pa)	318 / 501
▪ Airflow speed 3 (m ³ /h) / Max Pressure speed 3 (Pa)	483 / 558
▪ Airflow Powerspeed (m ³ /h) / Max Pressure Powerspeed (Pa)	784 / 589

Airflow and noise level

▪ Sound pressure speed 1 (dB(A)) / Sound power speed 1 (dB(A))	25 / 35
▪ Sound pressure speed 2 (dB(A)) / Sound power speed 2 (dB(A))	32 / 42
▪ Sound pressure speed 3 (dB(A)) / Sound power speed 3 (dB(A))	41 / 52
▪ Sound pressure Powerspeed (dB(A)) / Sound Powerspeed (dB(A))	51 / 62

Technical specifications

▪ Maximum power	325
▪ Voltage (V)	220-230
▪ Frequency (Hz)	50
▪ Length power supply cord (m)	1,3
▪ Power consumption in stand-by-mode (Ps) (W)	0.29
▪ Net weight (kg)	38

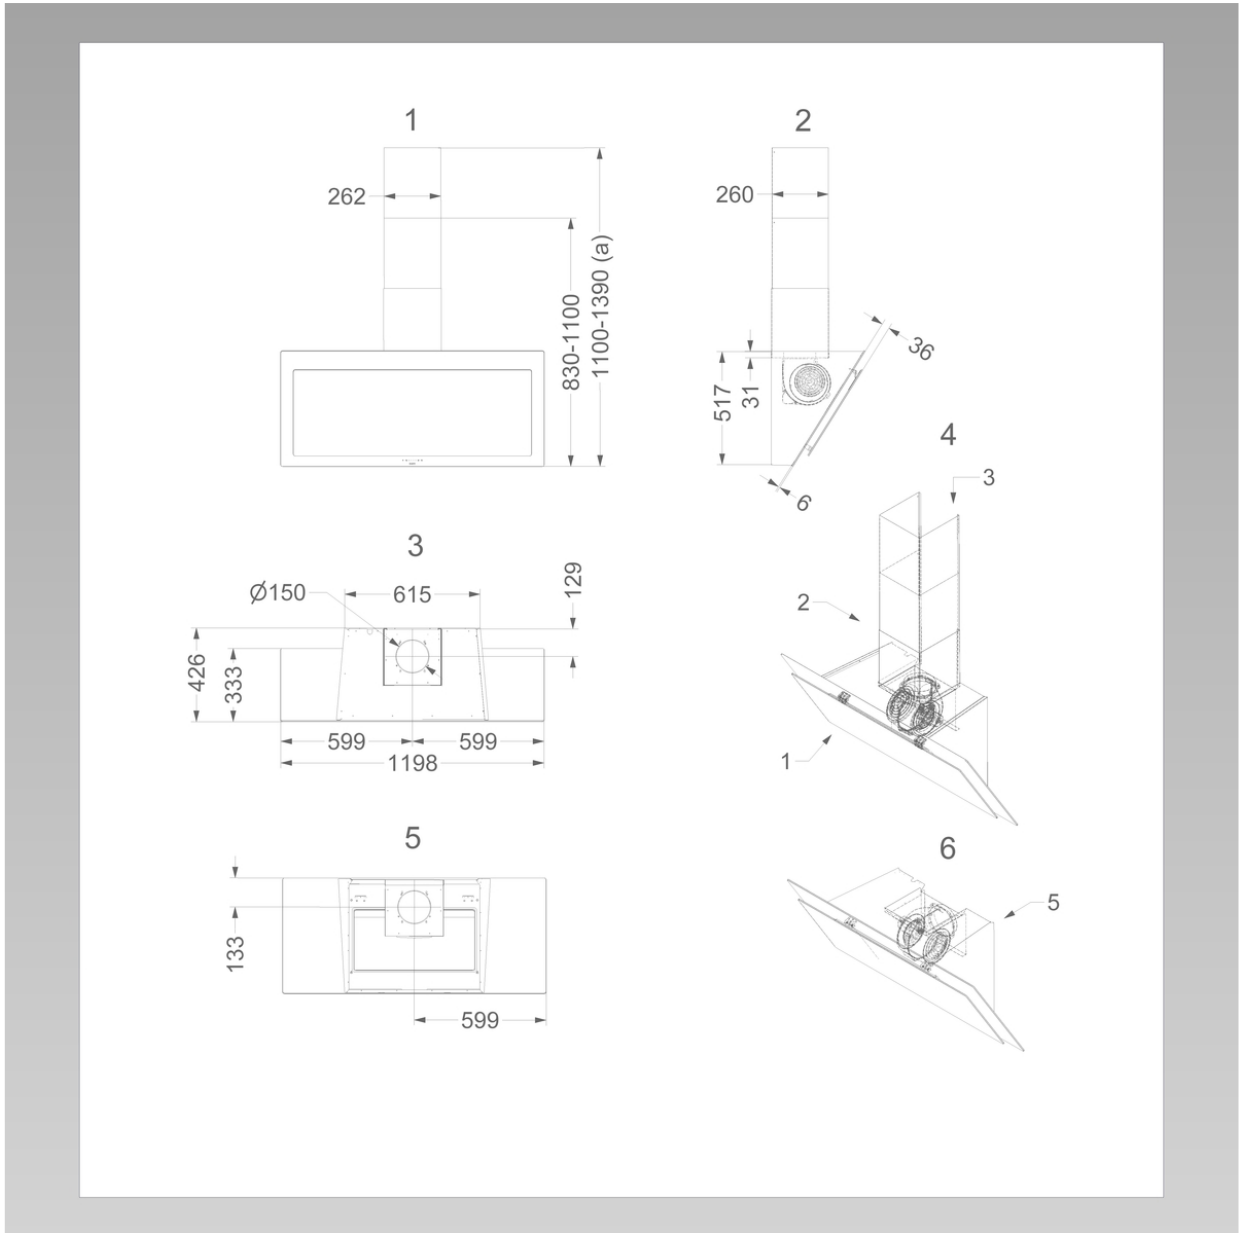

Installation accessories

Back panel & chimney extensions

- 7830100

Chimney extension

Efficiency Curve

