

Wall mounted
Vision 120 cm
Black

EAN 5414425103966



Energy label

▪ Lighting Efficiency class (LEhood)	A
--------------------------------------	---

Functions & features

▪ Control method	Touch control
▪ Number of speeds	3 + power
▪ Automatic Power revert (minutes)	6
▪ Motor	Integrated
▪ Sound absorber	Integrated
▪ Recirculation	Standard, Monoblock
▪ InTouch function	Optional
▪ Auto stop	▪
▪ Delayed switch off (minutes)	30
▪ Number of grease filters	2
▪ Grease filter	7830020
▪ Grease filter cleaning indication	▪
▪ Recirculation filter cleaning indication	▪

Dimensions

▪ Product dimensions exhaust (WxDxHmin-Hmax) (mm)	1198 x 426 x -
▪ Product dimensions recirculation (WxDxHmin-Hmax) (mm)	1198 x 426 x 517 - 517
▪ Advised mounting height induction hobs (Hmin-Hmax) (mm)	500 - 750
▪ Advised mounting height gas hobs (Hmin-Hmax) (mm)	650 - 750
▪ Advised mounting height ceramic hobs (Hmin-Hmax) (mm)	500 - 750
▪ Position exhaust	Top

Lighting

▪ Functional lighting type	Led
▪ Dimmable light	-
▪ Soft-ON/OFF	-
▪ Total energy consumption functional light (W)	4
▪ Color functional light	2700

Airflow and noise level


▪ Free airflow (m ³ /h)	800
▪ Airflow (m ³ /h) measured according to EN 61591	
▪ Sound regulation according to EN 60704-2-13	
▪ Airflow speed 1 (m ³ /h)	124
▪ Airflow speed 2 (m ³ /h)	196
▪ Airflow speed 3 (m ³ /h)	394
▪ Airflow Powerspeed (m ³ /h)	490
▪ Sound pressure speed 1 (dB(A)) / Sound power speed 1 (dB(A))	35 / 45
▪ Sound pressure speed 2 (dB(A)) / Sound power speed 2 (dB(A))	45 / 55

Airflow and noise level

▪ Sound pressure speed 3 (dB(A)) / Sound power speed 3 (dB(A))	56 / 66
▪ Sound pressure Powerspeed (dB(A)) / Sound Powerspeed (dB(A))	60 / 70


Technical specifications

▪ Maximum power	200
▪ Voltage (V)	220-230
▪ Frequency (Hz)	50
▪ Length power supply cord (m)	1,3
▪ Power consumption in stand-by-mode (Ps) (W)	0.29
▪ Net weight (kg)	38

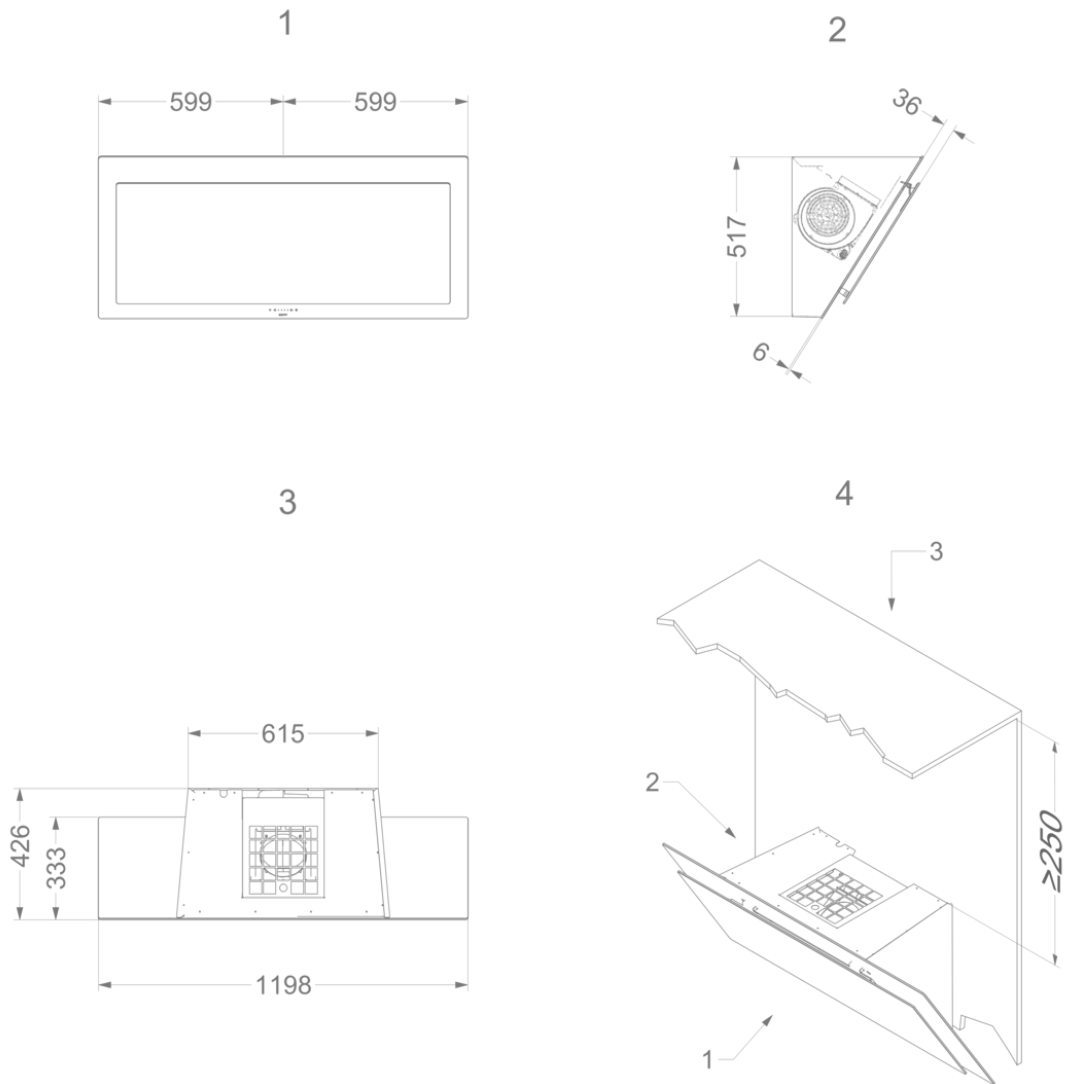

Accessories

Control kit



990021

InTouch Kit incl. remote control

