

DAD 4370 Levantar
Downdraft extractor
916 mm | 655 m³/h | 62.0 dB(a) | Touch | Con@ctivity | DynamicWhite



- Easy recirculation mode installation with plug&play accessory set
- Motorised retractable deflector plate – Hood in Motion
- -
- DynamicWhite – harmonisation of colour temperature with other light sources
- Efficient filtration- 10-ply stainless-steel grease filter



EAN: 4002516975083 / Material number: 12963330 /
Old Material Number: 28D4370BGB

General information	
Model identifier	DAD 4370 Levantar
Manufacturer material number	12963330
EAN number	4002516975083
Marketing class	Gold
Construction type	
Downdraft extractor	•
Construction type and design	
Colour	Obsidian black
Operating modes	
Type of air guide	Can be retrofitted
Recirculation conversion kit (order separately)	DUU 600,DUP 150
Active charcoal filter (order separately)	DKF 30-P, DKF 30-R
Design	
Edge extraction	•
User convenience	
Miele@home	•
Electronic controls	•
Con@ctivity	Personalised
Power levels (number without Booster level)	3
Touch-on-glass controls	•
Booster levels	2
Run-on time 5/15 min.	•
Grease filter saturation indicator	•
Active charcoal filter saturation indicator	•
Motor-operated cooker hoods	•
Smart Extras	
Push notifications	•
AmbientLight	•
DynamicWhite	•
Smart Extras	
RemoteUpdate	•
Alexa voice control	•
Google voice control	•
Smart Home Integration	•
Efficiency	
Energy efficiency class (A+++ to D)	A
PowerManagement system	•
Annual energy consumption in kWh/year	41.1
Fluid dynamic efficiency class	A
Lighting efficiency class	A
Grease filtering efficiency class	B
Cleaning and care	
Easy-to-clean canopy interior – CleanCover	•
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	2

DAD 4370 Levantar

Downdraft extractor

916 mm | 655 m³/h | 62.0 dB(a) | Touch | Con@ctivity | DynamicWhite



EAN: 4002516975083 / Material number: 12963330 /
Old Material Number: 28D4370BGB

Lighting	
Number x W	1 x 12 W
Light intensity in lx	400 lx
Colour temperature in K	3500 Kelvin
Dimmer function	•
Fan	
Dual-action fan	•
Exhaust air	
Air throughput in Level 1 (m ³ /h) according to EN 61591	205
Air throughput in Level 2 (m ³ /h) according to EN 61591	350
Air throughput in Level 3 (m ³ /h) according to EN 61591	450
Air throughput in Booster level (m ³ /h) according to EN 61591	610
Air throughput in Booster level 2 (m ³ /h) according to EN 61591	655
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	43.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	55.0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	62.0
Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	69.0
Sound power in Booster level 2 (dB(A) re 1 pW) acc. to EN 60704-3	71.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	30.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	42.0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	48.0
Sound pressure in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13	55.0
Sound pressure in Booster level 2 (dB(A) re 20 µPa) acc. to EN 60704-2-13	57.0
Recirculation	
Air throughput in Level 1 (m ³ /h) according to EN 61591	165
Air throughput in Level 2 (m ³ /h) according to EN 61591	320
Air throughput in Level 3 (m ³ /h) according to EN 61591	420
Air throughput in Booster level (m ³ /h) according to EN 61591	525
Air throughput in Booster level 2 (m ³ /h) according to EN 61591	560
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	49.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	63.0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	69.0
Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	74.0

DAD 4370 Levantar

Downdraft extractor

916 mm | 655 m³/h | 62.0 dB(a) | Touch | Con@ctivity | DynamicWhite

EAN: 4002516975083 / Material number: 12963330 /

Old Material Number: 28D4370BGB

Sound power in Booster level 2 (dB(A) re 1 pW) acc. to EN 60704-3 75.0

Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13 36.0

Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13 50.0

Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13 55.0

Sound pressure in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13 61.0

Sound pressure in Booster level 2 (dB(A) re 20 µPa) acc. to EN 60704-2-13 62.0

Safety

Safety switch-off •

Single-ply safety glass (ESG) •

Technical data

Canopy width in mm 916

Overall height for vented and external in in. (mm) 1008

Overall height for extraction mode and external mode cooker hoods in mm 1288

Canopy height in mm 708

Overall height for recirculation in in. (mm) 1008

Canopy depth in mm 171

Overall height for recirculation mode cooker hoods in mm 1288

Cut-out dimension in mm (width) with surface-mounted installation 815

Cut-out dimension in mm (depth) with surface-mounted installation 106

Cut-out dimension in mm (width) with flush-fit installation – internal 815

Cut-out dimension in mm (depth) with flush-fit installation – internal 106

Cut-out dimension in mm (width) with flush-fit installation – external 920

Cut-out dimension in mm (depth) with flush-fit installation – external 124

Net weight in kg 34.0

Length of supply lead in m 1.4

Standard plug fitted •

Total rated load in kW 0.25

Installation on unit floor Yes

Installation on floor Yes

Min. base unit width in mm 900

Glass frame width in mm 916

Voltage in V 230

Fuse rating in A 10

Number of phases 1

Frequency in Hz 50

Installation notes

Bottom exhaust duct •

Diameter of exhaust duct in mm 150

DAD 4370 Levantar
Downdraft extractor
916 mm | 655 m3/h | 62.0 dB(a) | Touch | Con@ctivity | DynamicWhite




EAN: 4002516975083 / Material number: 12963330 /
Old Material Number: 28D4370BGB

Optimum combination with hob subject to availability	KM 8575 FL
Joint installation with hob in one cut-out	Yes
Flush-fit installation	Yes
Surface-mounted installation	Yes
Accessories included	
Longer appliance feet	•
Connection strip for combination with hob	•

DAD 4370 Levantar


Downdraft extractor

916 mm | 655 m³/h | 62.0 dB(a) | Touch | Con@ctivity | DynamicWhite




DAD4370, Installation drawings

1. Stepped cutout for flush-fit installation in stone worktops (granite, marble), 2. Ensure that materials are sufficiently stable, 3. Cut-out off-centre, Exhaust duct Ø 150 mm., *Only required when flat ducting is laid under cabinets or the DUU 600 recirculation box is used.

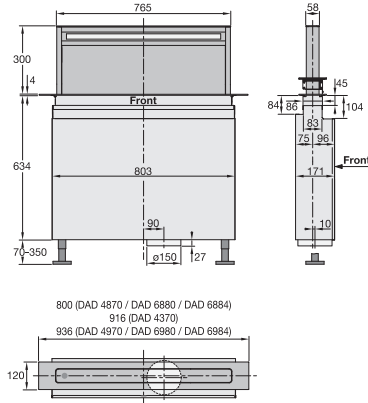


DAD4370, DAD4870, DAD4970, DAD6880, DAD6980, Installation drawings

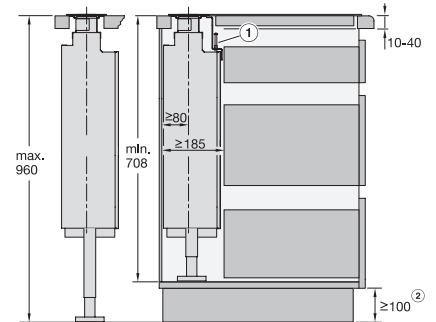


DAD4370, DAD4870, DAD4970, DAD6880, DAD6980, Installation drawings

1. If you install the extractor hood and hob flush with each other in a shared cut-out, you must use the angle strip provided., 2. The minimum dimension is required if flat ducts are installed under the cabinets or if the DUU 600 recirculation box is used.

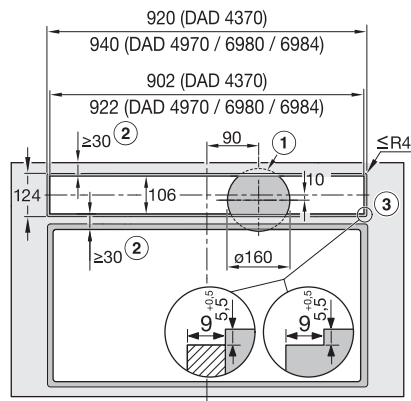


DAD4370, DAD4970, DAD6980, flush, Installation drawings

Installation of the downdraft hood and cooktop in separate cutouts., Flush installation., 1. Cut-out for exhaust air duct in the cabinet base., 2. Ensure sufficient stability of the worktop., 3. Step milling for flush mounting in a countertop. Note the, the different milling widths for the hob and the downdraft. Instead of a step milling, a wooden strip offset 5.5 mm downwards can be installed as an alternative (not included in the scope of delivery)., Exhaust air connection Ø 150 mm.

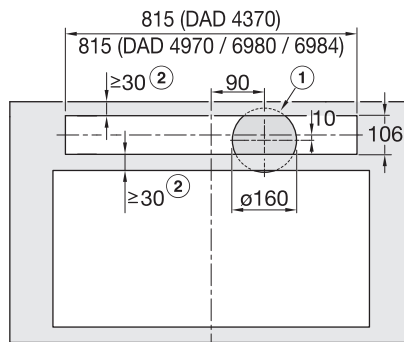

DAD4370, DAD4970, DAD6980, overlying, Installation drawings

Installation of the downdraft hood and cooktop in separate cutouts., Surface-mounted installation., 1. Cutout for exhaust air line in cabinet base., 2. Ensure sufficient stability of the worktop., Exhaust air connection Ø 150 mm

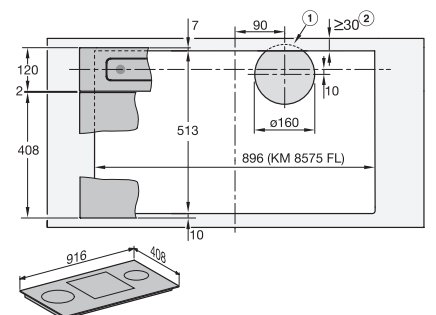


DAD4370, surface mounted installation, common cutout, Installation drawings

Side-by-side installation of the downdraft hood and the cooktop in a common cutout., Example: combination with KM 8575 FL., Surface-mounted installation., 1. Cut-out for exhaust air line in cabinet base., 2. Ensure sufficient stability of the worktop., Exhaust air connection Ø 150 mm.

DAD 4370 Levantar

Downdraft extractor

916 mm | 655 m³/h | 62.0 dB(a) | Touch | Con@ctivity | DynamicWhite

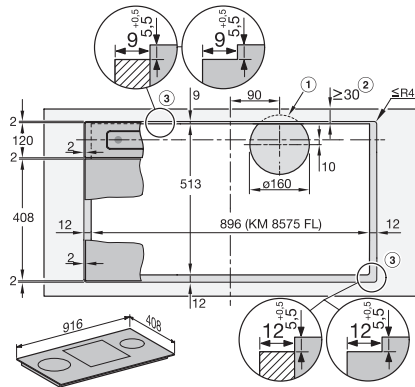

DAD4370, flush, Installation drawings

Side-by-side installation of the downdraft hood and the cooktop in a common cutout, Example: combination with KM 8575 FL, Flush installation, 1. Cut-out for exhaust air duct in the cabinet base., 2. Ensure sufficient stability of the worktop., 3. Step milling for flush mounting in a worktop. Note the, the different milling widths for the hob and the downdraft. , Instead of a step milling, a 5.5 mm downwardly offset wooden strip can be installed (not included in the scope of delivery)., , Exhaust air connection ø 150 mm.