

## DGC 7460 HCX Pro

Handleless combination steam oven

for steam cooking, baking, roasting with networking + BrilliantLight.



- Large clear text display with sensor controls – DirectSensor
- Perfect results – DualSteam technology
- Crispy outside, succulent inside – combination cooking
- Convenient operation – water container behind automatic panel
- Easy cleaning – HydroClean and stainless steel oven compartment

A+

EAN: 4002516626213 / Material number: 12101340 / Old Material Number: 23746079GB

| Construction type and design                                     |               |
|--|---------------|
| Steam combination oven   | •             |
| ArtLine  | •             |
| Handleless   | •             |
| Appliance Colour   | Graphite grey |
| Convenience features   |               |
| Rapid heat-up  | •             |
| Pre-heating  | •             |
| External steam generation  | •             |
| Oxygen sensor  | •             |
| Individual humidity settings in combination cooking              | •             |
| Menu cooking without transfer of taste                           | •             |
| Prepare plated meals with "Mix & Match"                          | •             |
| Automatic programmes with ability to make individual adjustments | •             |
| Keeping warm   | •             |
| Crisp function   | •             |
| Operating modes  |               |
| Defrost  | •             |
| Automatic programmes   | •             |
| Country-specific automatic programmes                            | •             |
| Combination cooking  | •             |
| Combination cooking with Fan plus                                | •             |
| Combination cooking with Conventional heat                       | •             |
| Combination cooking with grill                                   | •             |
| Steam cooking  | •             |
| Sous-vide  | •             |
| Reheat   | •             |
| Roast with moisture  | •             |
| Grill operating modes  | •             |
| Grill  | •             |
| Economy grill  | •             |
| Fan plus   | •             |
| Intensive bake   | •             |
| Cake plus  | •             |
| Conventional heat  | •             |
| Top heat   | •             |
| Bottom heat  | •             |
| Fan grill  | •             |
| Eco fan heat   | •             |
| Eco steam cooking  | •             |
| Plate warming  | •             |
| Special applications   | •             |
| User convenience   |               |
| Networking with Miele@home                                       | •             |
| Display  | DirectSensor  |
| SoftOpen   | •             |
| Touch2Open   | •             |
| MultiLingua  | •             |
| Motorised lift-up control panel with SoftClose                   | •             |

## DGC 7460 HCX Pro

Handleless combination steam oven

for steam cooking, baking, roasting with networking + BrilliantLight.




EAN: 4002516626213 / Material number: 12101340 / Old Material Number: 23746079GB


|  |      |
|--|------|
| Quantity-independent cooking   | •    |
| Steam cooking on up to 4 levels at the same time                           | •    |
| Automatic menu cooking   | •    |
| Steam reduction before end of programme                                    | •    |
| Time of day display  | •    |
| Date display   | •    |
| Minute minder  | •    |
| Programmable start of cooking duration                                     | •    |
| Programmable end of cooking duration                                       | •    |
| Programmable cooking duration  | •    |
| Actual temperature display   | •    |
| Target temperature display   | •    |
| Buzzer when desired temperature is reached                                 | •    |
| Recommended temperature  | •    |
| User programmes  | •    |
| Individual settings  | •    |
| <b>Efficiency and sustainability</b>                                       |      |
| Energy efficiency class (A+++ – D)   | A+   |
| Power rating in off mode in W  | 0.5  |
| Power rating in standby mode in W  | 1.0  |
| Power rating in networked standby in W                                     | 2.0  |
| Time until automatic switch to standby in min                              | 20   |
| Time until automatic switch to networked standby in min                    | 20   |
| Time until automatic switch to off mode in min                             | 20   |
| <b>Cleaning and care</b>   |      |
| Stainless-steel oven compartment with linen structure                      | •    |
| Hinged grill element   | •    |
| External steam generator   | •    |
| HydroClean   | •    |
| Maintenance programmes   | •    |
| Soak programme   | •    |
| Rinse programme  | •    |
| Oven compartment drying programme  | •    |
| Quick-release side racks   | •    |
| Removable stainless-steel side racks                                       | •    |
| Automatic descaling  | •    |
| CleanGlass door  | •    |
| <b>Steam techn./water supply</b>   |      |
| DualSteam  | •    |
| Steam generator power in kW  | 3.30 |
| Fresh water container volume in l  | 1.4  |
| Fresh water container behind motorised control panel                       | •    |
| Condensate container behind motorised lift-up control panel with SoftClose | •    |
| Drain filter   | •    |
| <b>Safety</b>  |      |
| Appliance cooling system and touch-cool front                              | •    |
| Safety switch-off  | •    |
| System lock  | •    |
| Vapour cooling system  | •    |
| Sensor lock  | •    |




DGC 7460 HCX Pro  
 Handleless combination steam oven  
 for steam cooking, baking, roasting with networking + BrilliantLight.

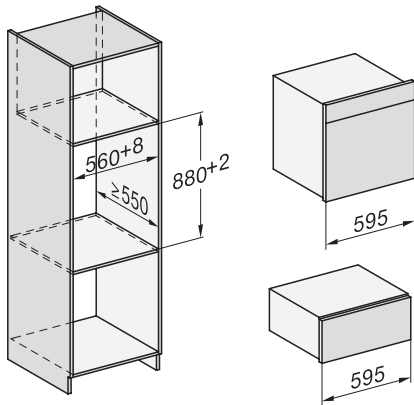


ESW7x20, DGC7x6xHCPro, DGC7x6xHCXPro installation drawings

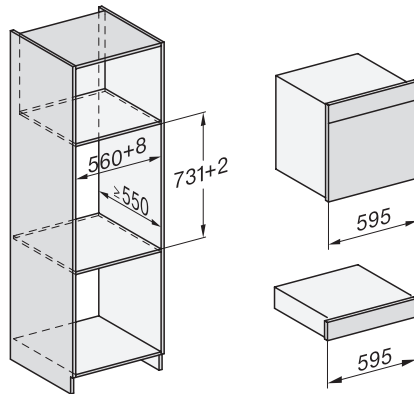


ESW7x10, EVS7010, DGC7x6xHCPro, DGC7x6xHCXPro installation drawings

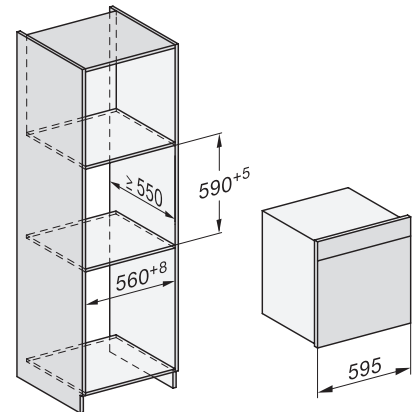


built-in DGC XXL, installation drawing

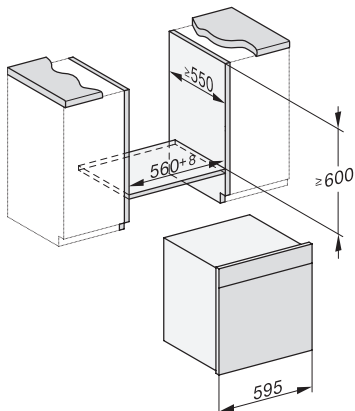


built-in DGC XXL build-under, installation drawing  
 Worktop overhang ≤ 29 mm

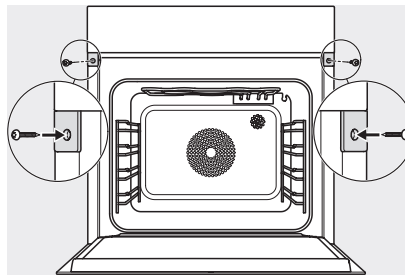


screw joint DGC XXL, installation drawing

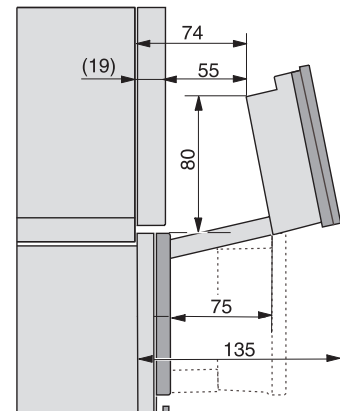

DGC7x4x swivel range of the aperture, installation drawings

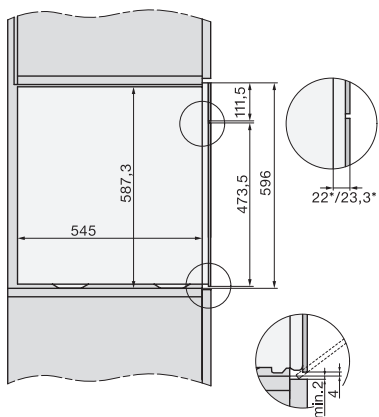

side view DGC XXL, installation drawings

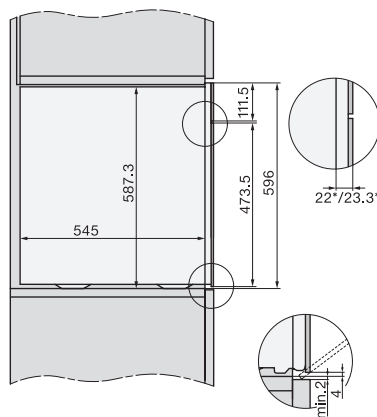

Seitenansicht DGC XXL, installation drawing, GB, AU  
 22 mm glass, 23.3 mm stainless steel