

# KV194B3







Product family	Hood
Hood Type	Chimney Cooker Hoods
Design	Angled
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Perimeter extraction	Yes
Material	Glass
EAN code	8017709327903
Aesthetics	Linea
Colour	Black
Finishing	Glass
Glass Type	Black
Serigraphy colour	Grey
Logo	Silk screen









## Controls

Control setting	Touch control back-lighted White	Led colour	White
-----------------	-------------------------------------	------------	-------

## Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-Vent 2.0	

## Technical Features

							
No. of lights	2	Anti-grease filters	Stainless steel				
Light type	LED	Charcoal filters included	Yes				
Light power	2,1 W	Filter replacement indicator	Yes				
Dimmer mode	Yes	Vent outlet	150 mm				
Light colour temperature range	2700° - 4000° °K	Minimum distance from GAS hob	650 mm				
Free outlet maximum capacity	820 m³/h	Minimum distance from ELECTRIC hob	450 mm				
Motor power	275 W	Non return valve	Yes				
No. of filters	2						

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	277	50
Speed 2	406	63
Speed 3	636	70
Intensive speed	782	72

## Performance / Energy Label



Annual Efficiency Consumption (AEChood)	41 KWh/year	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	50 dBA
Energy efficiency class (EEC)	A+	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	70 dBA
Fluid Dynamic Efficiency (FDE)	36,2	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	72 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0,7
Lighting Efficiency (LE)	34,8 lux/W	Energy Efficiency Index per first cavity	41,2
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	403 m <sup>3</sup> /h
Grease Filtering Efficiency (GFE)	64,3 %	Measured air pressure at best efficiency point (Qbep)	479 Pa
Grease Filtering Efficiency Class (GFEC)	E	Measured electric power input at best efficiency point (Wbep)	148 W
Air flow at mininum speed (Qmin)	277 m <sup>3</sup> /h	Normal Power of the light system (WI)	5 W
Maximum extraction rate	636 m <sup>3</sup> /h	Average illumination of the light on the cooking surface (Emiddle)	139 lux
Intensive extraction rate	782 m <sup>3</sup> /h	Sound power level at highest setting (Lwa)	71 dBA

## Electrical Connection

Nominal power	279 W	Frequency (Hz)	50-60 Hz
Voltage	220-240 V	Power supply cable length	1500 mm





## Also available

Alternative colours available

Neptune Grey

Available colours

KV194G

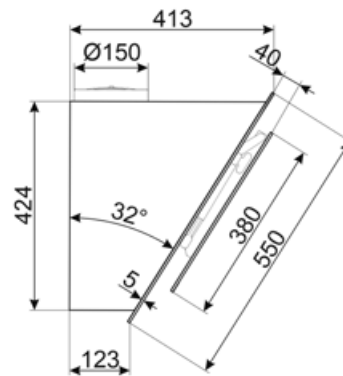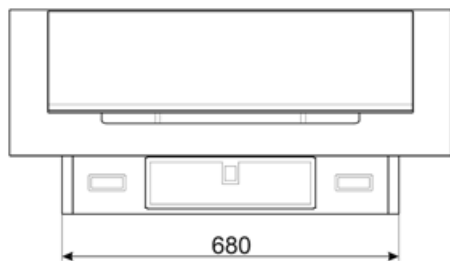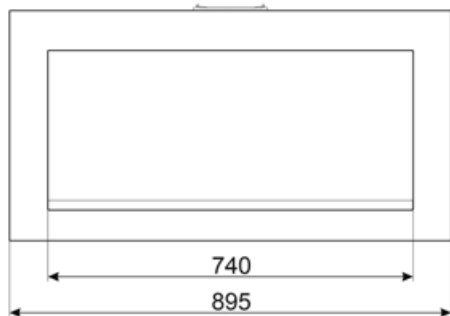

---

## Compatible Accessories

---



### **KITALLFC**

Universal Charcoal filter Stainless Steel AISI 304. The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



### **KITCMNKVX**

Chimney Extension in Stainless Steel for hood KV\*series



### **KITCMNKVMB**













Chimney Extension in Stainless Steel for hood KV\*series 300 mm\*200 mm + 500/850 mm



### **KITFCKV1**

Kit 2 pcs Charcoal Filter for Hood KV1\*series

## Symbols glossary

- |   |   |  |  |
|---|---|--|--|
|   | 24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level. |   | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.  |
|   | Connection between hob and hood   |   | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.             |
|   | Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.                             |   | A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed. |
|   | ...   |   | Warning light(s): to advise when filters need changing.  |
|   | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.   |   | Perimeter extraction panels: very efficient and aid noise reduction.   |
|  | ...   |  | Intensive/turbo setting: when extra fast extraction is required.   |

---

## Benefit

---

### **Perimetral aspiration**

Enhanced extraction with a perimeter aspiration system ensures optimised performance, for a cleaner, fresher kitchen

Perimeter aspiration enhances extraction efficiency by directing vapors along the edges of the panel beneath the filters, optimizing air capture

### **Dimmering & Tunable lights**

Customisable LED lighting lets you adjust both the intensity and colour temperature, from warm to cool tones, so you can create the perfect lighting for any mood or task

### **Touch display back lighted white**

Intuitive and immediate usability thanks to the elegant white LED backlit touch display

### **Autovent 2.0**

Centralised and practical control via Bluetooth connection between hob and hood, letting you manage extraction automatically while you cook.

The Auto-Vent 2.0 system enables automatic hood management through connection with the hob: both appliances switch on simultaneously, and the extraction power adjusts in real time to the cooking intensity.